


3-PHASE INDUCTION MOTORS

AEEF · AEVF

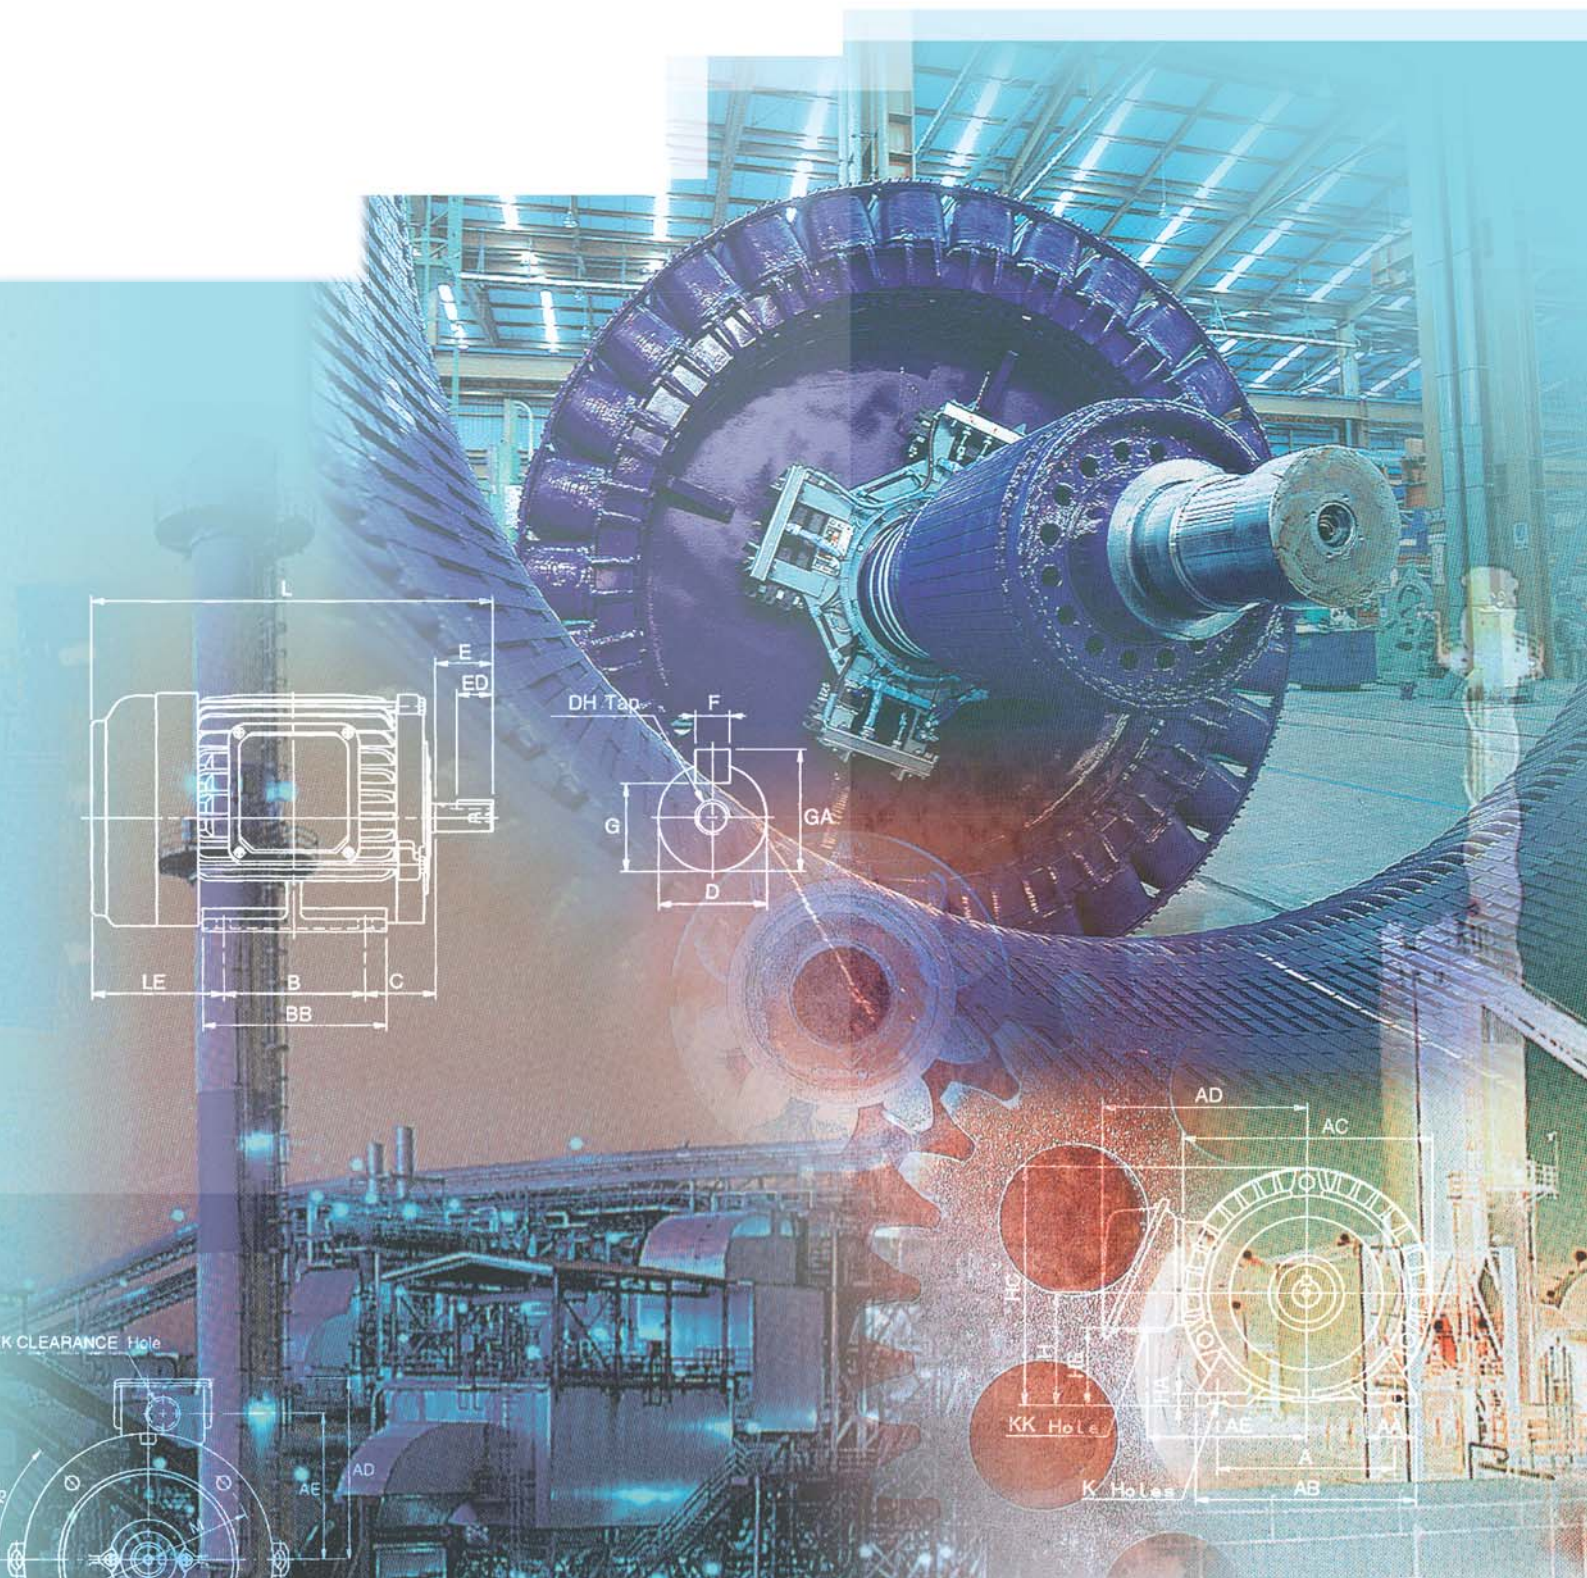

SPECIFICATION TABLE

TYPE:AEFF, AEVF

LOW VOLTAGE SQUIRREL CAGE

ITEM	STANDARD SPECIFICATION	
RATING	Kind of Motors	Squirrel - Cage Induction Motors (SCIM) .
	Design Standards	IEC, CNS, JIS .
	Voltages	220V, 380V, or 380V, 400V, 415V, 440V, 460V .
	Frequency	50Hz or 60Hz .
	Output Range	0.25 HP ~ 270 HP (0.18 kW ~ 200 kW) .
	Time Duty	Continucus. S1 , S.F. : 1.0 .
	Frame Nos.	63 ~ 315M .
	Protection Enclosure	Totally Enclosed Fan Cooled (IP 54) .
	Cooling Method	Self External Fan, Surface Cooling (IC 411) .
	Mounting	Horizontal Foot Mounting (IM 1001), Flange Mounting (IM3011) .
	Environment Conditions	Place : Shadow, Non-Hazardous. Ambient Temperature : -15°C ~ 40°C . Relative Humidity : Less Than 90% RH (Non - Condensation) . Altitude : Less Than 1000M .
	Drive Method	Belt Service , However , 2 Pole 30 HP and Up Coupling Service is the Way .
	Direction of Rotation	Bi - Directional .
Method of Starting	Full Voltage Direct On Line or Δ - Δ Starting .	
APPLICATION	Shaft	Carbon Steel , Cylindrical Single Extension with Keyway and Key .
	Bearing	Bracket Mounting , Vacuum De - Gassed High Quality Open Bearings for Frame No. 250 ~ 315, Grease Pre - Packed Shielded Rolling Bearings for the Others.
	Lubrication	Mineral Oil, Li - Base Grease (Frame 63 ~ 250 MULTEMP SRL, Frame 280 ~ 315 SHELL ALVANIA RL3).
CONSTRUCTION	Terminal Box	Pressed Steel , Larger Size , Can be Set 90° Apart , With Conduit Hole Cable Entrance At Left Side View from the Drive End . Option : Cable Grand.
	Lead Terminal	Solderless Lug Terminals. Option : Wire Connection Seat.
	Stator Insulation	Class E Insulation System for Frame No. 63 ~ 112M Class B Insulation System for Frame No. 132S ~ 180M Class F Insulation System for Frame No.180L ~ 315M
	Rotor Winding	Squirrel Cage, Copper Bar Brazed or Aluminium Conductor with End - Ring and Waffer Blades Integrally Cast .
	Painting	Phenolic Rust Proof Base Plus Lacquer Surface Finished Painting in Blue - Gray Color (Munsell 7.5B 3.5 / 0.5) .
	Name Plate	Stainless Steel Plate .
	Bolt Thread	ISO Metric System .
	Grounding Terminal	Be Set Inside the Terminal Box .
PERFORMANCE	Test Procedure	IEC 60034, CNS 10919 (C3192) And Full Voltage Measuring Starting Performance .
	Temperature Rise	Winding Temperature Rise (by Resistance Method) Class E Insulation Not to Exceed 75°C. Class B Insulation Not to Exceed 80°C. Class F Insulation Not to Exceed 100°C.

PERFORMANCE DATA

220V 60Hz

OUTPUT		FULL LOAD RPM	FRAME NO.	EFFICIENCY			POWER FACTOR			CURRENT		TORQUE			ROTOR GD ² kg-m ²
HP	KW			FULL LOAD (%)	3/4 LOAD (%)	1/2 LOAD (%)	FULL LOAD (%)	3/4 LOAD (%)	1/2 LOAD (%)	FULL LOAD (A)	LOCKED LOAD (A)	FULL LOAD (kg-m)	LOCKED LOAD (%FLT)	PULL OUT (%FLT)	
0.25	0.18	3335	63	61.0	59.5	52.0	77.0	67.5	55.5	1.0	6	0.054	400	370	0.002
		1640	63	67.0	66.0	61.0	65.5	56.0	44.0	1.1	6	0.111	250	240	0.002
		1120	71	64.0	57.5	49.5	60.0	53.0	43.0	1.3	6	0.162	260	290	0.007
0.5	0.37	3400	71	75.0	74.5	70.0	86.0	79.0	68.5	1.5	12	0.107	340	310	0.002
		1680	71	70.0	66.5	60.5	71.0	60.5	48.0	2.0	12	0.216	200	250	0.005
		1135	80	68.0	64.0	57.5	67.0	56.0	45.0	2.2	12	0.320	200	240	0.009
1	0.75	3395	80	77.0	77.5	75.0	87.0	83.5	73.5	2.9	19	0.214	220	280	0.005
		1710	80	76.0	74.5	70.0	76.5	67.5	54.5	3.4	19	0.424	250	280	0.009
		1140	90L	76.0	75.5	71.5	71.0	62.5	50.0	3.6	19	0.637	200	240	0.017
2	1.5	3425	90L	80.0	81.5	80.0	89.0	83.0	74.5	5.5	40	0.424	250	280	0.010
		1715	90L	79.0	79.0	75.0	81.0	70.5	57.0	6.1	40	0.846	220	280	0.017
		1140	100L	78.0	77.5	74.0	74.0	66.0	54.0	6.8	40	1.273	180	220	0.033
3	2.2	3450	90L	82.0	84.5	82.0	89.0	85.5	76.5	8.0	68	0.631	230	280	0.015
		1735	100L	82.0	83.5	80.5	82.5	78.5	66.5	8.7	68	1.255	210	260	0.033
		1160	112M	82.0	82.0	78.5	77.0	67.5	56.0	9.3	68	1.877	180	270	0.059
5	3.7	3485	112M	84.5	86.0	83.5	90.0	88.5	82.0	12.9	110	1.041	240	340	0.038
		1745	112M	85.0	85.5	83.0	85.0	80.0	70.0	13.5	110	2.080	220	300	0.059
		1160	132S	84.0	83.0	79.5	77.0	69.5	58.0	15.1	110	3.129	180	230	0.151
7.5	5.5	3505	132S	85.0	86.5	84.0	90.0	86.5	81.5	19.2	160	1.553	220	260	0.063
		1750	132S	87.0	87.0	85.0	84.0	78.5	68.5	20.1	160	3.111	230	280	0.104
		1160	132M	85.0	86.0	83.5	77.5	72.0	60.5	22.3	160	4.693	200	230	0.217
10	7.5	3510	132S	86.5	88.0	85.5	90.0	87.0	81.0	25.1	200	2.068	200	270	0.076
		1750	132M	88.5	89.0	87.5	88.0	85.5	76.0	25.1	200	4.148	220	250	0.143
		1175	160M	87.0	86.0	84.0	80.0	68.0	62.5	28.1	200	6.178	280	300	0.400
15	11	3540	160M	88.0	87.5	86.5	90.0	88.0	84.0	37.1	290	3.076	220	300	0.147
		1760	160M	90.0	89.5	88.0	89.0	86.0	78.5	36.7	290	6.186	220	250	0.297
		1170	160L	89.5	88.5	88.0	84.0	73.0	70.5	39.1	290	9.306	240	260	0.588
20	15	3520	160M	89.5	90.0	89.0	91.0	90.0	87.5	48.1	360	4.124	210	260	0.183
		1760	160L	90.5	90.5	90.5	86.0	84.0	76.5	50.3	360	8.248	230	260	0.381
		1170	180MC	90.0	91.5	90.5	85.0	79.5	70.5	51.2	360	12.408	230	250	1.054
25	18.5	3530	160L	90.0	91.5	90.5	89.5	90.5	87.0	60.8	480	5.141	240	290	0.237
		1760	180MC	91.0	91.0	90.0	85.5	83.0	77.0	62.9	440	10.310	210	240	0.571
		1170	180LC	90.0	91.0	90.5	84.5	80.0	72.0	64.4	440	15.510	220	250	1.233
30	22	3540	180MA	90.5	91.5	89.5	90.0	88.5	83.5	72.1	550	6.151	210	250	0.302
		1765	180MC	91.5	92.5	91.5	88.0	83.5	77.0	72.9	550	12.338	210	250	0.706
		1175	180LC	91.0	92.0	91.0	84.0	78.5	69.5	76.8	550	18.533	250	260	1.438
40	30	3520	180LA	90.5	91.0	89.5	91.0	90.0	85.5	95.1	680	8.248	230	250	0.358
		1760	180LC	92.0	93.0	92.5	88.0	84.5	78.0	96.7	680	16.497	220	240	0.810
		1170	200LC	92.0	92.5	92.5	85.0	80.0	73.5	100	620	24.816	190	200	1.919
50	37	3545	200LA	91.0	90.0	87.5	89.0	90.5	87.0	121	800	10.238	150	210	0.602
		1770	200LC	92.0	93.0	92.0	86.0	85.5	81.5	124	950	20.504	240	250	1.422
		1175	200LC	92.5	93.0	92.5	84.0	78.0	70.5	126	850	30.888	210	230	2.419
60	45	3545	200LA	91.5	91.5	90.0	90.0	86.5	82.5	143	950	12.285	170	220	0.633
		1765	200LC	92.0	93.0	92.5	89.0	87.0	84.0	144	1060	24.675	210	230	1.643
		1180	225SC	92.5	93.0	92.0	86.0	84.0	76.5	148	980	36.908	220	220	3.023
75	55	3550	225SA	92.0	93.0	91.5	92.0	91.5	87.5	174	1220	15.335	150	210	1.187
		1775	225SC	92.5	93.5	92.0	86.5	85.5	79.5	184	1220	30.670	180	200	1.979
		1175	A250SC	93.0	93.5	93.0	85.5	85.0	78.0	185	1220	46.331	200	200	4.923
		885	280S	92.0	91.5	90.0	77.5	73.5	65.0	202	1215	60.5	135	210	16.0
100	75	3550	A250SA	93.5	93.5	93.0	91.5	89.5	88.5	229	1600	20.447	130	240	1.678
		1775	A250SC	93.5	92.5	91.0	89.0	87.0	83.0	235	1600	40.893	170	270	4.226
		1175	A250MC	93.5	94.0	93.5	86.0	83.5	78.5	244	1600	61.775	200	250	6.382
		885	280M	92.5	92.0	90.5	77.5	74.0	65.0	276	1660	82.5	135	210	19.6
125	90	3555	A250MA	94.0	93.5	92.0	91.5	90.5	86.5	285	2150	25.522	150	260	2.014
		1770	A250MC	94.0	94.0	93.0	92.0	92.0	89.5	283	2150	51.261	190	230	5.101
		1180	280S	94.0	92.8	92.0	85.0	81.5	73.5	296	1990	74.3	130	230	13.8
		885	315S	93.0	92.5	90.5	78.0	74.0	65.0	326	1990	99.0	130	210	21.5
150	110	3565	280S	94.0	93.3	91.5	89.5	88.5	84.0	343	2435	30.0	100	220	4.0
		1770	280S	94.7	94.2	92.7	87.0	85.0	78.0	350	2435	60.5	130	230	7.6
		1180	280M	94.3	93.6	92.0	85.5	82.0	73.5	358	2435	90.8	130	230	15.2
		885	315M	93.0	92.5	90.5	78.0	74.0	65.0	398	2435	121.0	130	210	25.5
175	132	3565	280M	94.5	93.8	92.0	89.0	88.0	83.5	412	2920	36.1	100	220	4.5
		1770	280M	94.9	94.4	92.9	88.0	86.0	79.0	415	2920	72.6	130	230	8.6
		1185	315S	94.5	94.0	92.5	86.0	83.0	77.0	426	2920	108.5	130	230	18.5
200	160	3570	315S	94.8	94.1	92.0	90.5	79.8	86.5	489	3540	43.6	100	220	5.7
		1775	315S	95.0	94.5	92.9	89.5	87.5	80.5	494	3540	87.8	130	230	11.2
		1185	315M	94.6	94.2	92.7	86.5	83.5	80.0	513	3540	131.5	130	230	21.4
250	200	3570	315M	95.0	94.2	92.0	91.2	90.5	88.5	605	4425	54.7	100	220	7.2
		1775	315M	95.0	94.2	92.0	90.0	88.0	80.5	612	4425	109.7	120	230	14.2

NOTE: 1. The above are typical values based on test. 2. Tolerance According to IEC 34-1.
 3. Efficiency, power factor, speed and torque are the same for other voltages. Current values vary inversely with voltage.
 4. Data subject to change without notice.

PERFORMANCE DATA

380V 50Hz

OUTPUT		FULL LOAD RPM	FRAME NO.	EFFICIENCY			POWER FACTOR			CURRENT		TORQUE			ROTOR GD ² kg-m ²
HP	KW			FULL LOAD (%)	3/4 LOAD (%)	1/2 LOAD (%)	FULL LOAD (%)	3/4 LOAD (%)	1/2 LOAD (%)	FULL LOAD (A)	LOCKED LOAD (A)	FULL LOAD (kg-m)	LOCKED LOAD (%FLT)	PULL OUT (%FLT)	
0.25	0.18	2725	63	56.0	59.5	54.0	76.5	71.0	59.0	0.66	3.5	0.067	400	330	0.002
		1345	63	64.0	63.0	57.0	68.5	58.5	45.5	0.65	3.5	0.135	220	240	0.002
		910	71	60.0	54.5	48.0	60.0	52.0	42.0	0.79	3.5	0.199	260	270	0.007
0.5	0.37	2815	71	75.0	74.5	70.5	85.0	78.0	67.0	0.89	7	0.129	320	280	0.002
		1370	71	65.5	66.0	60.5	70.0	62.0	49.0	1.24	7	0.265	200	230	0.005
		930	80	63.0	61.5	55.0	67.0	57.0	45.5	1.34	7	0.390	200	230	0.009
1	0.75	2800	80	76.5	79.0	76.0	87.0	82.0	73.0	1.70	11	0.259	220	280	0.005
		1395	80	73.2	73.0	68.5	74.0	67.0	54.0	2.13	11	0.520	250	280	0.009
		950	90L	71.0	71.5	66.5	70.0	61.0	49.0	2.28	11	0.764	190	230	0.017
2	1.5	2840	90L	80.0	82.0	80.0	88.0	84.0	75.5	3.22	23	0.511	250	280	0.010
		1400	90L	78.5	78.5	75.0	78.5	74.0	60.5	3.68	23	1.037	220	280	0.017
		930	100L	76.0	76.0	71.0	71.5	66.0	52.5	4.17	23	1.561	180	220	0.033
3	2.2	2845	90L	83.5	84.5	83.0	88.5	84.0	75.5	4.60	39	0.765	250	280	0.015
		1435	100L	81.0	81.5	79.0	82.0	74.0	62.0	5.12	39	1.517	210	260	0.033
		955	112M	79.0	79.0	76.5	76.0	67.5	55.0	5.66	39	2.280	180	230	0.059
5	3.7	2880	112M	85.5	86.5	84.5	90.0	87.0	79.0	7.36	63	1.260	240	320	0.038
		1445	112M	84.5	84.5	82.5	83.5	76.5	65.0	8.03	63	2.512	220	290	0.059
		960	132S	82.0	82.0	77.0	75.5	65.5	53.5	9.15	63	3.781	180	230	0.151
7.5	5.5	2905	132S	86.5	87.5	85.5	88.5	86.5	81.0	11.1	93	1.874	210	260	0.063
		1445	132S	86.0	86.0	83.0	82.5	77.0	65.5	12.0	93	3.767	220	280	0.104
		960	132M	84.5	84.0	81.0	77.5	71.0	60.0	13.0	93	5.671	200	230	0.217
10	7.5	2905	132S	88.5	88.5	87.0	88.5	85.0	78.0	14.5	116	2.499	200	250	0.076
		1450	132M	87.5	88.0	86.5	85.5	81.5	71.0	15.2	116	5.006	220	250	0.143
		975	160M	86.0	86.5	84.0	80.0	71.5	59.0	16.5	116	7.445	270	300	0.400
15	11	2940	160M	88.5	88.5	87.0	90.0	87.5	81.5	21.3	168	3.703	210	290	0.147
		1460	160M	89.5	90.0	89.0	88.0	84.0	76.0	21.6	168	7.457	220	250	0.297
		970	160L	88.5	89.5	88.0	84.0	79.5	69.5	22.9	168	11.225	220	260	0.588
20	15	2920	160M	90.0	91.0	90.5	91.0	90.0	87.5	27.7	209	4.972	210	260	0.183
		1465	160L	90.5	90.5	89.0	88.5	83.0	77.5	28.3	209	9.909	230	260	0.381
		975	180MC	89.0	90.5	90.0	82.5	79.0	71.0	30.9	209	14.889	210	230	1.054
25	18.5	2930	160L	90.0	91.0	90.0	89.5	91.5	88.0	35.2	268	6.193	240	290	0.237
		1455	180MC	91.0	91.5	91.0	86.5	82.0	76.0	36.0	268	12.472	210	240	0.571
		975	180LC	90.0	90.5	90.0	82.5	78.0	70.0	38.2	268	18.612	220	240	1.233
30	22	2940	180MA	91.5	91.5	90.0	90.0	87.5	82.5	41.3	319	7.407	210	250	0.302
		1465	180MC	90.5	92.0	92.0	85.5	82.0	75.0	43.9	319	14.864	210	240	0.706
		975	180LC	90.0	90.5	89.0	82.0	76.0	66.0	46.1	319	22.334	230	260	1.438
40	30	2920	180LA	92.0	92.0	91.0	91.0	90.0	86.0	54.2	398	9.943	210	240	0.358
		1455	180LC	91.5	91.5	91.0	85.0	82.0	75.0	58.3	398	19.955	220	230	0.810
		970	200LC	91.5	91.5	91.0	83.0	80.0	74.0	59.7	398	29.932	190	200	1.919
50	37	2940	200LA	92.0	92.0	90.5	87.5	87.5	84.5	70.4	463	12.345	150	210	0.602
		1470	200LC	92.0	92.5	92.5	86.0	86.0	82.0	71.6	463	24.689	190	210	1.422
		975	200LC	92.0	92.0	91.0	80.0	76.0	67.0	77.0	463	37.223	230	250	2.419
60	45	2955	200LA	92.5	92.5	90.0	87.0	85.0	80.0	84.5	582	14.738	160	220	0.633
		1465	200LC	92.5	93.0	93.0	88.5	87.0	81.5	83.1	582	29.728	190	200	1.643
		980	225SC	92.5	92.5	91.5	84.0	82.0	73.0	87.5	582	44.440	220	250	3.023
75	55	2945	225SA	93.0	93.0	91.5	92.0	91.5	89.0	99.4	725	18.485	140	260	1.187
		1470	225SC	93.0	93.0	92.5	85.0	82.5	75.0	108	725	37.034	180	200	1.979
		980	A250SC	93.5	94.0	93.5	86.0	83.0	76.5	106	725	55.550	200	200	4.923
		735	280S	91.5	91.2	89.5	76.0	69.0	58.0	120	700	72.8	140	210	16.0
100	75	2960	A250SA	94.0	94.0	92.0	90.0	88.0	83.5	134	972	24.522	130	280	1.678
		1475	A250SC	94.0	94.0	93.5	89.0	87.0	82.0	136	927	49.211	240	250	4.490
		975	A250MC	93.5	93.5	92.5	87.0	84.0	78.0	140	927	74.447	220	250	6.382
		735	280M	91.5	91.2	89.5	76.0	69.0	58.0	164	960	99.4	140	210	19.6
125	90	2950	A250MA	94.0	94.0	93.0	90.5	89.5	85.0	167	1245	30.757	140	260	2.014
		1475	A250MC	94.0	94.0	93.5	92.0	92.5	88.5	164	1245	61.513	190	230	5.101
		975	280S	93.8	93.6	92.0	81.0	76.5	66.5	180	1150	90.0	130	230	13.8
		735	315S	92.0	91.5	90.0	77.0	70.0	60.0	193	1150	119.3	140	210	21.5
150	110	2950	280S	94.0	93.3	91.5	87.5	85.5	81.5	203	1400	36.3	100	220	4.0
		1475	280S	94.5	94.1	92.5	83.0	81.0	74.0	213	1400	72.6	130	230	7.6
		975	280M	94.0	93.6	92.0	81.0	76.5	66.5	219	1400	110.0	130	230	15.2
		735	315M	92.0	91.5	90.0	77.0	70.0	60.0	236	1400	145.7	140	210	25.5
175	132	2950	280M	94.5	93.8	92.0	87.0	85.0	81.0	244	1690	43.6	100	220	4.5
		1475	280M	94.8	94.3	92.8	83.5	81.5	74.0	254	1690	87.2	130	230	8.6
		980	315S	94.2	93.7	92.2	83.5	76.5	66.5	255	1690	131.0	130	230	18.5
200 215	160	2960	315S	94.6	94.2	92.5	90.0	88.5	83.5	285	2050	52.6	100	220	5.7
		1480	315S	94.9	94.4	92.8	88.5	86.5	79.5	290	2050	105.3	130	230	11.2
		980	315M	94.5	94.0	92.4	85.5	81.5	73.5	301	2050	159.0	130	230	21.4
250 270	200	2960	315M	94.8	94.4	92.7	90.0	88.5	83.5	356	2560	65.8	100	220	7.2
		1480	315M	94.9	94.5	92.8	88.5	86.5	79.5	362	2560	131.6	130	230	14.2

NOTE: 1. The above are typical values based on test. 2. Tolerance According to IEC 34-1.
 3. Efficiency, power factor, speed and torque are the same for other voltages. Current values vary inversely with voltage.
 4. Data subject to change without notice.

HORIZONTAL FOOT MOUNTED

Totally Enclosed Fan Cooled, Squirrel Cage Rotor.

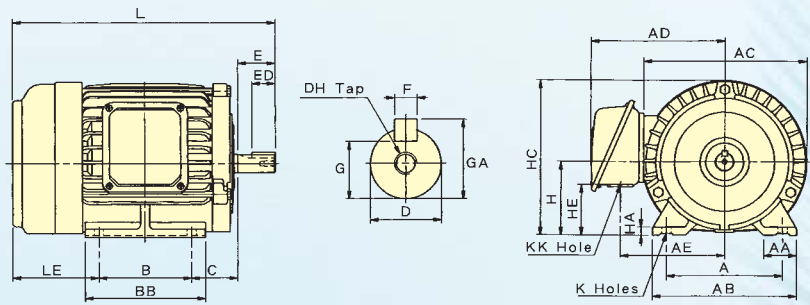


Fig.1

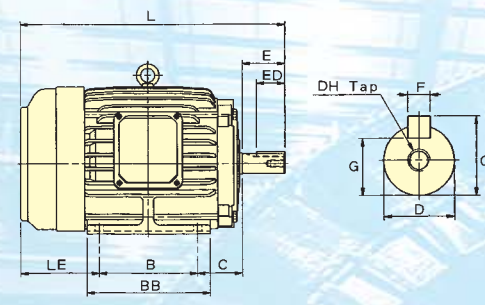


Fig.2

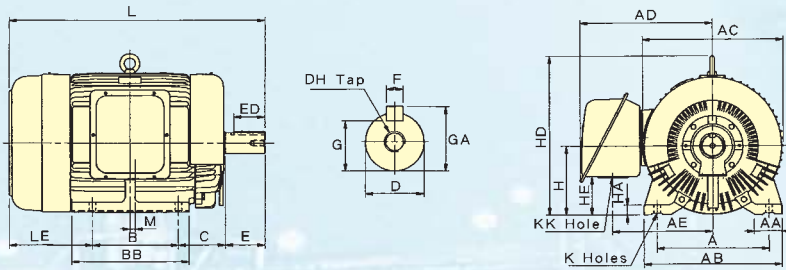


Fig.4

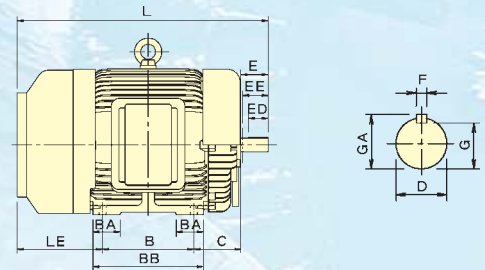


Fig.5

OUTPUT (HP)				FRAME NO.	FIG NO.	A	AA	AB	AC	AD	AE	AF	B	BA	M	BB	C	H	HA	HC	HD	
2P	4P	6P	8P																			
1/4	1/4	—	—	63	1	100	28	120	144	123	93	—	80	—	—	100	40	63	8	135	—	
1/2	1/2	1/4	—	71		112	35.5	140	162	133	103	—	90	—	—	115	45	71	8	152	—	
1	1	1/2	1/4	80		125	35.5	155	177	144	112	—	100	—	—	130	50	80	9	168.5	—	
2	3	2	1	1/2	90L	140	35.5	170	200	157	125	—	125	—	—	150	56	90	10	190	—	
—	3	2	1	100L	2	160	45	195	219	180	145	—	140	—	—	175	63	100	12.5	—	240	
5	5	3	2	112M		190	45	224	238	189	154	—	140	—	—	175	70	112	14	—	260	
7.5	10	7.5	5	132S		216	45	250	273	225	180	—	140	—	—	175	89	132	16	—	310	
—	10	7.5	5	132M	216	45	250	273	225	180	—	178	—	—	212	89	132	16	—	310		
15	20	15	10	7.5	160M	254	50	300	334	263	218	—	210	—	—	250	108	160	18	—	370	
25	20	15	10	160L	254	50	300	334	263	218	—	254	—	—	300	108	160	18	—	370		
30	—	—	—	180MA	279	75	355	382	305	250	—	241	—	—	297	121	180	20	—	430		
—	25	30	20	15	180MC	279	75	355	382	305	250	—	241	—	—	297	121	180	20	—	430	
40	—	—	—	180LA	3	279	75	355	382	305	250	—	279	—	—	335	121	180	20	—	430	
—	40	25	30	20		180LC	279	75	355	382	305	250	—	279	—	—	335	121	180	20	—	430
50	60	—	—	—		200LA	318	80	400	420	342	279	—	305	—	—	365	133	200	25	—	460
—	50	60	40	50	25	30	200LC	318	80	400	420	342	279	—	305	—	365	133	200	25	—	460
75	—	—	—	—	225SA	356	90	450	458	386	312	—	286	—	—	350	149	225	30	—	520	
—	75	60	40	—	225SC	356	90	450	458	386	312	—	286	—	—	350	149	225	30	—	520	
100	—	—	—	—	A250SA	406	100	500	510	479	364	—	311	—	19	425	168	250	36	—	590	
—	100	75	50	—	A250SC	406	100	500	510	479	364	—	311	—	19	425	168	250	36	—	590	
125	—	—	—	—	A250MA	406	100	500	510	479	364	—	349	—	28.5	480	168	250	36	—	590	
—	125	100	60	—	A250MC	406	100	500	510	479	364	—	349	—	28.5	480	168	250	36	—	590	
150	—	—	—	—	280S	457	110	560	625	610	455	305	368	110	—	445	190	280	36	—	710	
—	150	125	75	—	280S	457	110	560	625	610	455	305	368	110	—	445	190	280	36	—	710	
175	—	—	—	—	280M	457	110	560	625	610	455	305	419	130	—	495	190	280	36	—	710	
—	175	150	100	—	280M	457	110	560	625	610	455	305	419	130	—	495	190	280	36	—	710	
200	215	—	—	—	315S	508	115	615	625	610	455	305	406	115	—	490	216	315	40	—	740	
—	200	215	175	125	315S	508	115	615	625	610	455	305	406	115	—	490	216	315	40	—	740	
250	270	—	—	—	315M	508	115	615	625	610	455	305	457	115	—	540	216	315	40	—	740	
—	250	270	200	215	150	315M	508	115	615	625	610	455	305	457	115	—	540	216	315	40	—	740

Note: 1. Tolerance of shaft end diameter D: $\phi 11$ - $\phi 28$: j6, $\phi 38$ - $\phi 48$: k6, $\phi 55$ - $\phi 95$: m6 2. Tolerance of shaft center height h: +0, -0.5 for 250mm and under, +0, -1 for 280mm and over
 5. Data Subject to change without notice

IEC Dimensions

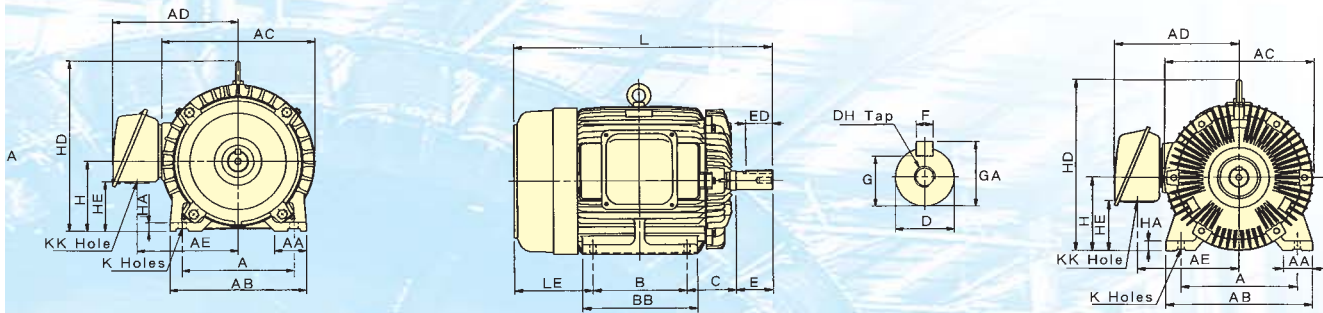


Fig.3

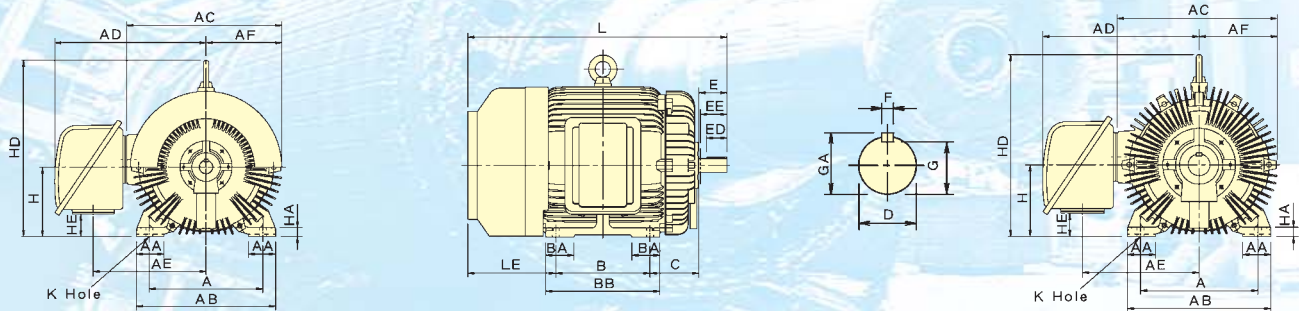


Fig.6

Dimension : mm

D	HE	K	KK	L	LE	SHAFT EXTENSION								BEARINGS		APPROX WEIGHT KGS		
						D	E	ED	EE	F	G	GA	DH	DRIVE END	OPP. DRIVE END			
	29	7	22	219	76	11	23	18	—	4	8.5	12.5	M4×8	*6201zz	*6201zz	8.5		
	54	7	22	250.5	85.5	14	30	24	—	5	11	16	M5×10	*6202zz	*6202zz	12		
	55	10	22	282.5	92.5	19	40	25	—	6	15.5	21.5	M6×12	*6204zz	*6204zz	14		
	65	10	22	332.5	101.5	24	50	32	—	8	20	27	M8×16	*6205zz	*6205zz	24.5		
3	71	12	28	374.5	111.5	28	60	40	—	8	24	31	M10×20	*6206zz	*6305zz	31		
5	83	12	28	391.5	121.5	28	60	40	—	8	24	31	M10×20	*6306zz	*6306zz	42		
0	83	12	35	454	145	38	80	64	—	10	33	41	M12×24	*6308zz	*6306zz	67		
0	83	12	35	492	145	38	80	64	—	10	33	41	M12×24	*6308zz	*6306zz	78		
7	108	14.5	35	608	180	42	110	80	—	12	37	45	M16×32	*6309zz	*6307zz	122		
7	108	14.5	35	652	180	42	110	80	—	12	37	45	M16×32	*6309zz	*6307zz	144		
	118	14.5	52	672	200	48	110	80	—	14	42.5	51.5	M16×32	*6311zzC3	*6310zzC3	185		
	118	14.5	52	672	200	48	110	80	—	14	42.5	51.5	M16×32	*6311zz	*6310zz	182		
	118	14.5	52	710	200	55	110	80	—	16	49	59	M20×40	*6312zzC3	*6310zzC3	213		
	118	14.5	52	710	200	55	110	80	—	16	49	59	M20×40	*6312zz	*6310zz	215		
0	128	18.5	65	770	222	55	110	80	—	16	49	59	M20×40	*6312zzC3	*6212zzC3	282		
0	128	18.5	65	800	222	60	140	110	—	18	53	64	M20×40	*6314zzC3	*6212zzC3	315		
4	153	18.5	92	786	241	55	110	80	—	16	49	59	M20×40	*6312zzC3	*6212zzC3	345		
4	153	18.5	92	816	241	65	140	110	—	18	58	69	M20×40	*6315zz	*6213zz	373		
5	139	24	92	890.5	301.5	55	110	80	—	16	49	59	M20×40	6313C3	6313C3	502		
5	139	24	92	920.5	301.5	75	140	110	—	20	67.5	79.5	M20×40	NU316	6313	515		
5	139	24	92	947.5	320.5	55	110	80	—	16	49	59	M20×40	6313C3	6313C3	508		
5	139	24	92	977.5	320.5	75	140	110	—	20	67.5	79.5	M20×40	NU316	6313	520		
0	91	24	—	1012	344	55	110	80	104	16	49	59	—	6314C3	6314C3	700		
0	91	24	—	1072	344	85	170	140	157	22	76	90	—	NU320C3	6316	720	720	780
0	91	24	—	1062	343	55	110	80	104	16	49	59	—	6314C3	6314C3	750		
0	91	24	—	1122	343	85	170	140	157	22	76	90	—	NU320C3	6316	830	830	860
3	126	28	—	1101	369	55	110	80	104	16	49	59	—	6314C3	6314C3	900		
3	126	28	—	1161	369	95	170	140	157	25	86	100	—	NU320C3	6316	950	950	920
3	126	28	—	1152	369	55	110	80	104	16	49	59	—	6314C3	6314C3	1020		
3	126	28	—	1212	369	95	170	140	157	25	86	100	—	NU320C3	6316	1040	1050	1020

and above. 3. Grease Pre-Packed shielded Rolling Bearings 4. Frequency 50Hz and 50/60Hz of center height 250mm and under are suitable for CE marking

FLANGE TYPE

Totally Enclosed Fan Cooled, Squirrel Cage Rotor.

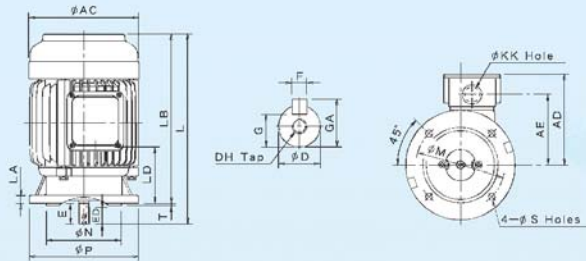


Fig.1

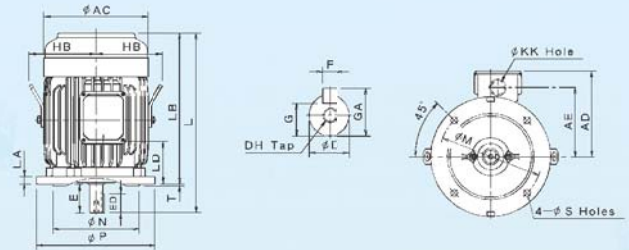


Fig.2

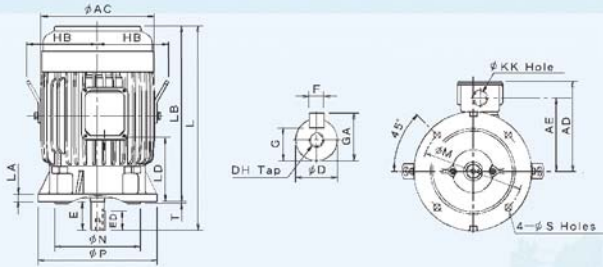


Fig.3

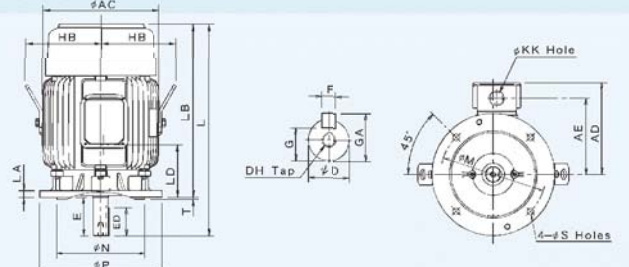


Fig.4

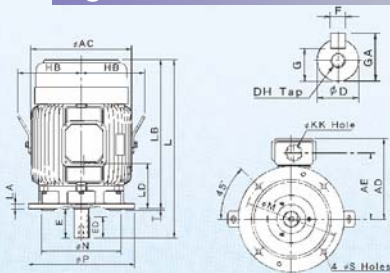


Fig.5

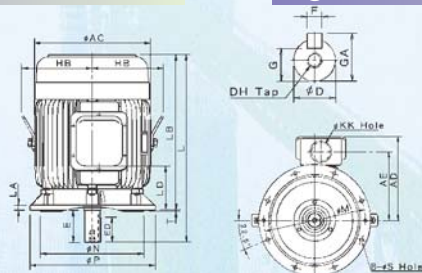


Fig.6

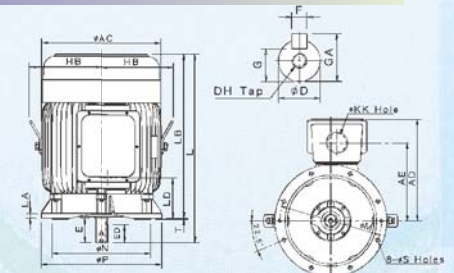


Fig.7

Dimension : mm

OUTPUT (HP)				FRAME NO.	FIG NO.	AC	AD	AE	HB	KK	L	LA	LB	LD	M	N	P	S	T	SHAFT EXTENSION									
2P	4P	6P	8P																	D	E	ED	F	G	GA	DH			
1/4	1/4	—	—	63	1	144	123	93	—	22	248	12	225	74	130	110	160	10	3.5	11	23	18	4	8.5	12.5	M 4 × 8			
1/2	1/2	1/4	—	71		162	133	103	—	22	277.5	12	247.5	82	130	110	160	10	3.5	14	30	24	5	11	16	M 5 × 10			
1	1	1/2	1/4	80	2	177	144	112	—	22	282	12	242	60	165	130	200	12	3.5	19	40	25	6	15.5	21.5	M 6 × 12			
2	3	2	1	90L		3	200	157	125	—	22	371.5	12	321.5	113	165	130	200	12	3.5	24	50	32	8	20	27	M 8 × 16		
—	3	2	1	100L	2	219	180	145	140	28	374.5	16	314.5	88	215	180	250	14.5	4	28	60	40	8	24	31	M10 × 20			
5	5	3	2	112M		3	238	189	154	150	28	431	16	371	135	215	180	250	14.5	4	28	60	40	8	24	31	M10 × 20		
7.5	10	7.5	5	3	132S	2	273	224	180	169	35	454	20	374	97	265	230	300	14.5	4	38	80	64	10	33	41	M12 × 24		
—	10	7.5	5	3	132M		2	273	224	180	169	35	492	20	412	116	265	230	300	14.5	4	38	80	64	10	33	41	M12 × 24	
15	20	15	10	7.5	160M	4	334	263	218	217	35	608	20	498	151	300	250	350	18.5	5	42	110	80	12	37	45	M16 × 32		
25	20	15	10	160L	4		334	263	218	217	35	652	20	542	173	300	250	350	18.5	5	42	110	80	12	37	45	M16 × 32		
30	—	—	—	180MA	5	382	305	250	241	52	672	20	562	170.5	350	300	400	18.5	5	48	110	80	14	42.5	51.5	M16 × 32			
—	25	30	20	180MC		5	382	305	250	241	52	672	20	562	170.5	350	300	400	18.5	5	48	110	80	14	42.5	51.5	M16 × 32		
40	—	—	—	180LA	5	382	305	250	241	52	710	20	600	189.5	350	300	400	18.5	5	55	110	80	16	49	59	M20 × 40			
—	40	25	30	180LC		5	382	305	250	241	52	710	20	600	189.5	350	300	400	18.5	5	55	110	80	16	49	59	M20 × 40		
50	60	—	—	200LA	6	420	342	279	260	65	770	20	660	194.5	400	350	450	18.5	5	55	110	80	16	49	59	M20 × 40			
—	50	60	40	50		25	30	200LC	6	420	342	279	260	65	800	20	660	194.5	400	350	450	18.5	5	60	140	110	18	53	64
75	—	—	—	225SA	6	458	386	312	286	92	786	22	676	190	500	450	550	18.5	5	55	110	80	16	49	59	M20 × 40			
—	75	60	40	225SC		6	458	386	312	286	92	816	22	676	190	500	450	550	18.5	5	65	140	110	18	58	69	M20 × 40		
100	—	—	—	A250SA	7	510	479	364	312	92	890.5	22	780.5	201.5	500	450	550	18.5	5	55	110	80	16	49	59	M20 × 40			
—	100	75	50	A250SC		7	510	479	364	312	92	920.5	22	780.5	201.5	500	450	550	18.5	5	75	140	110	20	67.5	79.5	M20 × 40		
125	—	—	—	A250MA		7	510	479	364	312	92	947.5	22	837.5	230	500	450	550	18.5	5	55	110	80	16	49	59	M20 × 40		
—	125	100	60	A250MC		7	510	479	364	312	92	977.5	22	837.5	230	500	450	550	18.5	5	75	140	110	20	67.5	79.5	M20 × 40		

Note: 1. Tolerance of shaft end diameter D: $\phi 11 - \phi 28 : j6, \phi 38 - \phi 48 : k6, \phi 55 - \phi 75 : m6$ 2. Tolerance of N: h7 3. Data Subject to change without notice

HEAD OFFICE

Teco Electric & Machinery Co., Ltd
10F No.3-1, Yuan Cyu St.
Nan-Kang Taipei 115
Taiwan ROC
Tel: +886 2 6615 9111
www.teco.com.tw

UNITED STATES

Teco-Westinghouse Motor Company
PO Box 227 (78680-0277)
5100 N.IH35
Round Rock Texas 78681 USA
Tel: +1 512 255 4141
+1 800 873 8326
www.tecowestinghouse.com

CANADA

Teco-Westinghouse
Motors Inc. (Canada)
18060-109th Ave
Edmonton, Alberta T5S 2K2 Canada
Tel: +1 780 444 8933
Fax: (780) 486-4575
24 HR Emergency Pager:
(780) 419 7734
Toll Free: 800-661-4023
Fax Toll Free: 888-USE-TWMI
www.twmi.com

UNITED KINGDOM

Teco Electric Europe Ltd.
26 Bond, Europa Way
Old Trafford, Manchester
M17 1WF England
Tel: +44 161 877 8025
www.teco.co.uk

NETHERLANDS

Teco Electric & Machinery B.V.
Teco's European Head Office
Rivium 3e Straat 27
2909 LH Capelle a/d IJssel
The Netherlands
Tel: +31 10 266 6633
Fax: +31 10 202 6415

GERMANY

Teco Electric & Machinery B.V.
Niederlassung Deutschland,
Marktstrasse 10
69 37441 Bad Sachsa
Germany
Tel: +49 5523 95340
Fax: +49 5523 953424
www.teco-westinghouse.de

SPAIN

Teco Electric & Machinery B.V.
Spain Office
C/Apostol Santiago, 38, 10-1
28017 Madrid, Spain
Tel/Fax: 34-91-326-30-91
E-mail: info@tecowestinghouse.es

TURKEY

OPTIMER Elektrik Makina Ltd.
Inonu cad. Sumko Sitesi M4-A blok
No: 2-kozyatagi-Istanbul 34742
Tel: +90-216-464 54 13Pbx.
Fax: +90-216-464 54 47

SAUDI ARABIA

Al Quraishi Electrical Services of S.A.
Al Quraishi Center, King Khalid Street,
P.O.Box 7386, Dammam-31462
Tel: +966 3 857-2537
Fax: +966 3 857-2541
www.aqesa.com

IRAN, AZERBAIJAN & ARMENIA

ATLAS DIBA Engineering & Trade Co.
No.3, Fakouri St., South Kadj Ave.
Golha Sq., Fatemi, Tehran, Iran
Tel: +98 21 88 33 03 81-3
Fax: +98 21 88 33 03 84
www.atlasdibaco.com

EGYPT

Amsol & Co.
38 Mossadak Street Dokki, Giza, Egypt
Tel: +202 333 79 774
Fax: +202 376 20 307

SOUTH AFRICA

ArmCoil Afrika (Pty) Ltd.
Unit 3 Prestige Park 127 Main Reef Road
Technikon Roodepoort
PO Box 500 Maraisburg 1700
Gauteng South Africa
Tel: +2711 763 2351
Fax: 0866 318 588
www.armcoil.co.za

AUSTRALIA

Teco Australia Pty Ltd.
335-337 Woodpark Road
Smithfield NSW 2164 Australia
Tel: +61 2 9765 8118
www.teco.com.au

NEW ZEALAND

Teco New Zealand Pty Ltd.
Unit 3, 477 Great South Road
Penrose Auckland New Zealand
Tel: +64 9 526 8480

JAPAN

Sankyo Co., Ltd.
26th fl. World Trading Center Bldg.
2-4-1 Hamamatsucho Minato-ku
Tokyo Japan 105-6126
Tel: +81 3 3435 9729
Fax: +81 3 3578 8381

SINGAPORE

Teco Electric & Machinery (PTE) Ltd.
18 chin Bee Drive
Singapore 619865
Tel: +65 6 265 4622
www.teco.com.sg

INDONESIA

P.T. Teco Multiguna Elektro
JL Bandengan Utara No. 83/1-2-3
Jakarta Utara-14440 Indonesia
Tel: +62 21 662 2201

CHINA

Shanghai Office
Rm 321 Building No.6
Lane 1279 Zhongshan W. Rd.
Shanghai. PRC
Tel: +86 21 5116 8255
Fax: +86 21 6278 8761

Wuxi Teco Electric & Machinery Co., Ltd
No. 9 South of Changjiang Road,
New Zone, Wuxi,
Jiangsu Province, PRC
Tel: +86 510 8534 2005
Fax: +86 510 8534 2001
www.wuxiteco.com

Jiangxi Teco Electric & Machinery Co., Ltd
189 Dongyuan Rd. Hi-Tech Zone, Nanchang
Jiangxi Province, PRC
Tel: +86 791 819 5999
Fax: +86 791 816 7730

Suzhou Teco Electric & Machinery Co., Ltd
No. 1 Changjiang W.Rd. Liuhe
Taicang City, Suzhou,
Jiangsu Province, PRC
Tel: +86 512 5361 9901
Fax: +86 512 5396 1058

Fujian Teco Precision Co., Ltd.
Xiayang, Jiazhaio, Zhanggang Village, Saiqi
Development
Zone, Fuan, Fujian, China
Tel: +86 593 633 0300
Fax: +86 593 633 0303

HONG KONG

Tecoson Industrial Development
(HK) Co., Ltd.
Rm 3712 Hong Kong Plaza
186-191 Connaught Rd. West
Hong Kong
Tel: +852 2858 3220

MALAYSIA

STE Marketing SDN BHD
6 Jalan Firma 2 Kawasan Perindustrian.
Tebrau 1 81100 Johor Bahru Johor Malaysia
Tel: +60 7 354 8008

THAILAND

Teco Electric & Machinery
(Thai) Co., Ltd.
128/1 Soi Watsrivaree noi
Moo 7 Bangna-Trad Road Km 18
Bangchalong Bangplee
Samuthprakarn 10540 Thailand
Tel: +662 3371311-20

VIETNAM

Teco(Vietnam) Electric & Machinery Co., Ltd
KCN LONG Thanh, Huyen Long Thanh,
Tinh Dong Nai. Vietnam
Tel: +84 61 3514151
Fax: +84 61 3514110

PHILIPPINES

Trade One
No. 56 Aragon Street San Francisco
Del Monte 1100 Quezon City Metro Manila,
Philippines
Tel: (632) 371-3032
Fax: (632) 371-1175
www.tradeoneinc.com

